

SPECIFICATIONS

LOA	31'-4"	12.0884
BEAM	31'-3"	9.5200
DEPTH	3'-3"	1.0300


NOTES

MOMENTS OF INERTIA FOR GUIDANCE IN SELECTION OF SUITABLE SECTION

MATERIALS

MAINMAST - 3" x 3" 1/2" 17" 1/2" WIRE TO 10' SW (3/8")
 REQUESTED MAIN TRILL - 1/2" x 1/2" x 1/2" (1/2")
 OXIDER - 7" x 1/2" 1/2" WIRE TO 12' SW (1/2")
 REQUESTED MAIN TRILL - 1/2" x 1/2" x 1/2" (1/2")
 SPINNAKER - 1/2" x 1/2" (1/2")
 MAIN POLE TAPPING LIFT - 2" x 1/2" 1/2" WIRE TO
 3" x 1/2" 1/2" WIRE TO 10' SW (3/8")
 MIN. 3" x 3" 1/2" (1/2")

RUNNER TRILL - 3" x 1/2" (1/2")
 TRILL WIRE TO 10' SW (3/8")
 REQUESTED MAIN TRILL -
 MIN. 3" x 3" 1/2" (1/2")

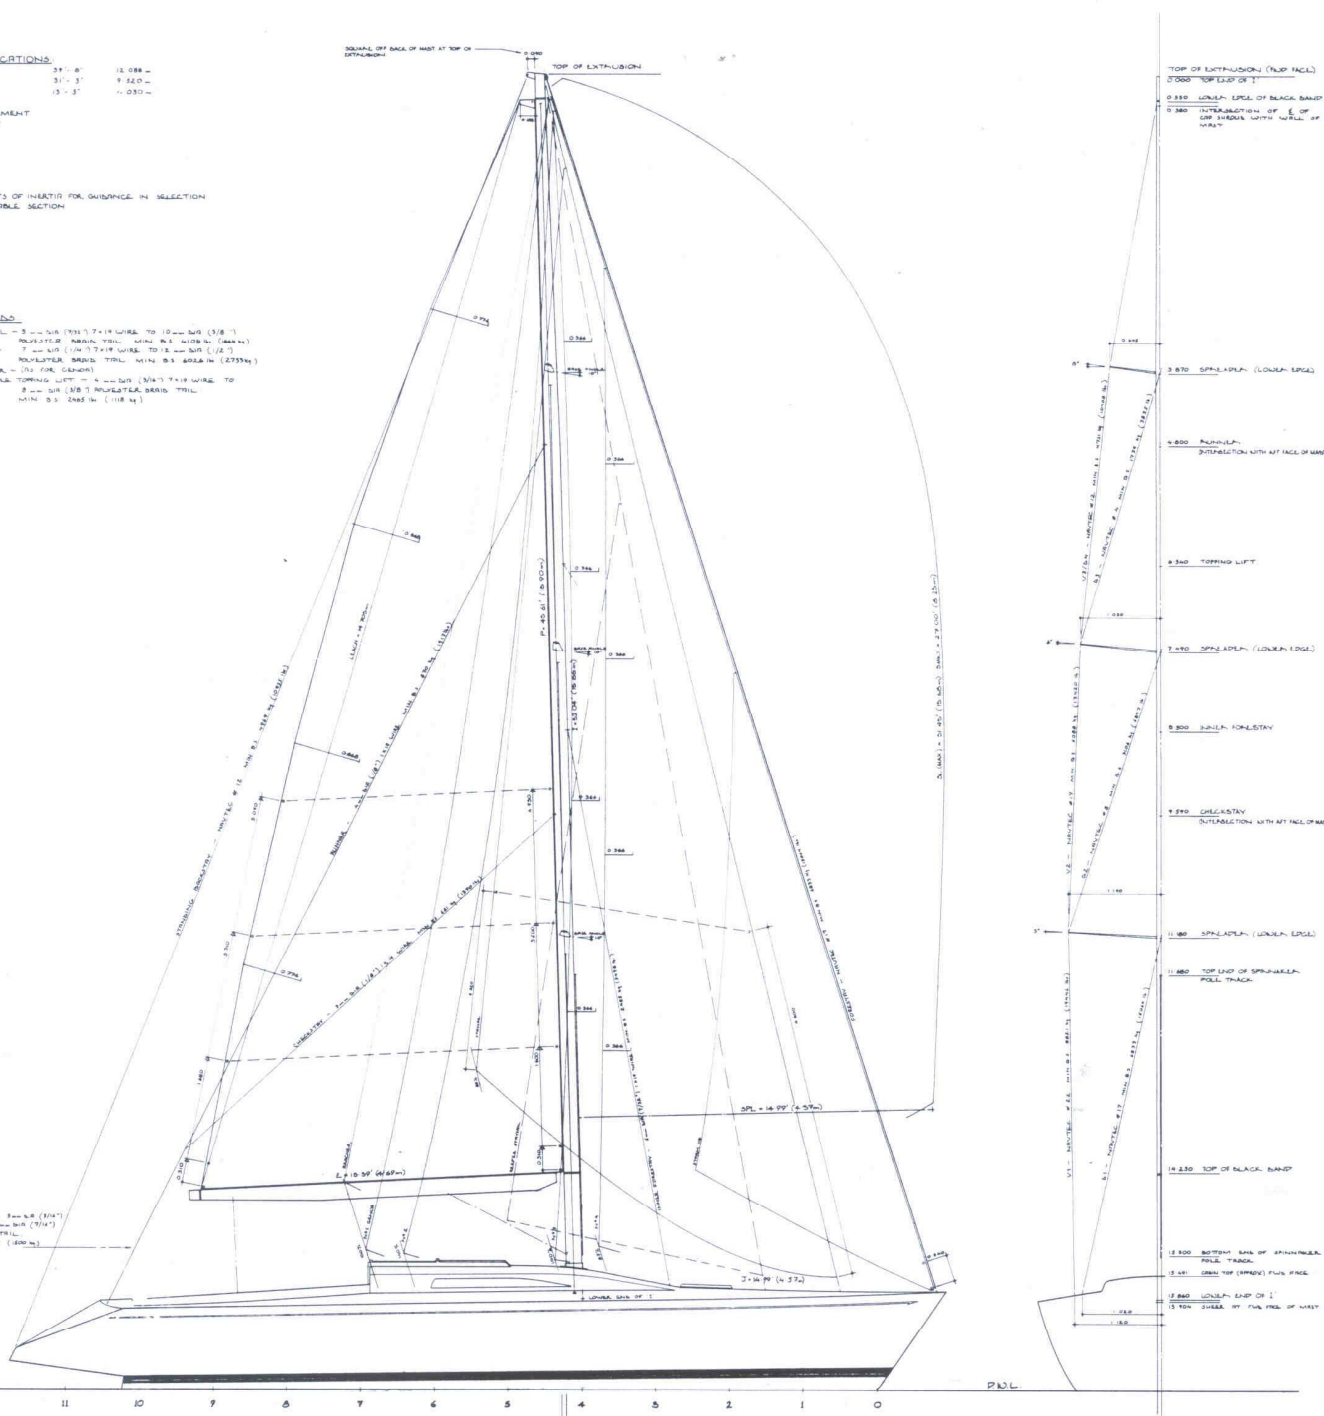

MAST PANEL IN CO. TRIM
 FROM LEFT FACE OF MAST AT
 TOP OF 1" TO 4" FROM TOP OF MAST
 AT THE CROWN

BRUCE FARM & ASSOC. INC. 100 PINE BLVD. WASHINGTON, D.C. 20004 4050 FT. ROAD, WRIGHT FOR GANNETT WASHINGTON, D.C.	
DATE: 1-25 SCALE: 1/2" = 1'-0" DRAWN BY: MATHIAS	REVISION: 145 CHECKED BY: J. J. J. APPROVED BY: BRUCE FARM & ASSOC. INC. PAGE OF 9